


MRS System 1000

12" - 20" o.c.
1-1/2" high
Snap-lock

.032 aluminum
22 or 24 gauge steel
16 oz. copper

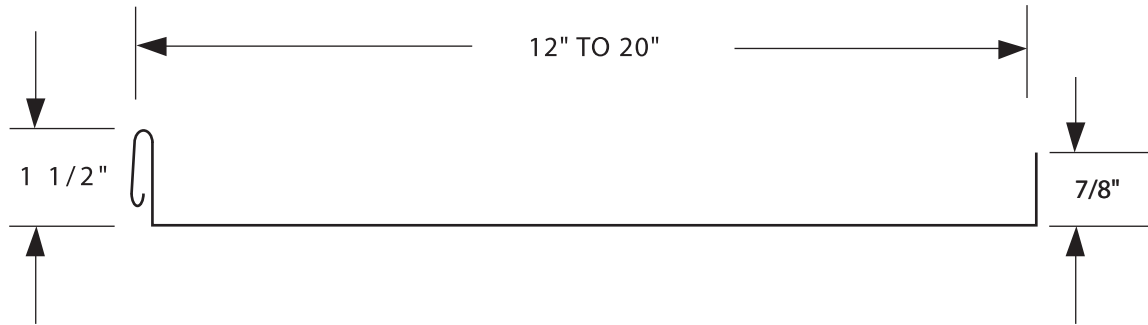

ASTM E1592 Tested
Ideal for residential applications

Material: .032 Aluminum, 22 or 24 gauge Steel, 16 oz. Copper
12" to 20" o.c.

Features: Striations (Recommended)
Flat
Stress Ribs

Requirements: Solid Substrate
Ice & Water Shield or Synthetic Underlayment
Minimum Roof Pitch: 3" on 12"

Finish: Hylar 5000[®] or Kynar 500[®]

Locations:

7670 Mikron Drive
Stanley, NC 28164
Tel: 704-820-3110
Fax: 704-820-0113

370-C Allied Drive
Conway, SC 29528
Tel: 843-347-6673
Fax: 843-347-6693

5512 Fort Henry Drive
Kingsport, TN 37663
Tel: 423-239-0013
Fax: 423-447-7150



Website: www.metalroofingsystems.biz